






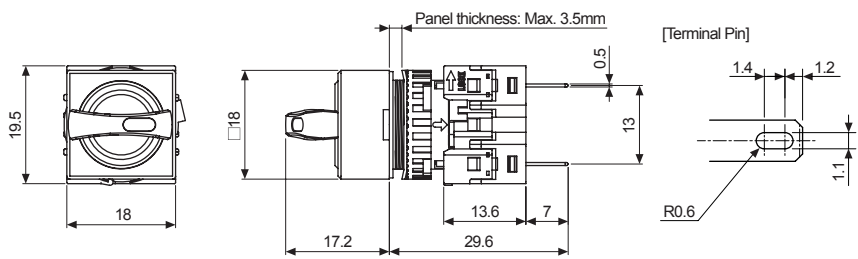





Ø16 Selector Switches

Ø16 Square Selector Switches (S16SRS Series)

Type	Appearance	Operating position		Model	Contact block	LED block
					C contact	DC voltage
Standard short lever, extended	 <p>S16SRS-S1W</p>	2-position, spring return		S16SRS-S1□C	1	
				S16SRS-S1□2C	2	
		2-position, maintained		S16SRS-S2□C	1	
				S16SRS-S2□2C	2	
		3-position, spring return two-way		S16SRS-S3□2C	2	
		3-position, maintained		S16SRS-S4□2C	2	
3-position, spring return from right		S16SRS-S5□2C	2			
3-position, spring return from left		S16SRS-S6□2C	2			
<p>※□ indicates color: R, B, G, Y, W</p> <p>※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact block: regular letters)</p> <p>※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.</p>						
<p>• Dimensions (unit: mm)</p>  <p>※For panel cut-out dimensions, please refer to page A-48.</p>						

Type	Appearance	Operating position	Model	Contact block		LED block	
				C contact	DC voltage		
Standard short lever, extended (illuminated)		2-position, spring return	S16SRS-L1□C5	1	1	1 (5VDC)	
			S16SRS-L1□C12			1 (12VDC)	
			S16SRS-L1□C24			1 (24VDC)	
			S16SRS-L1□2C5			2	1 (5VDC)
			S16SRS-L1□2C12				1 (12VDC)
			S16SRS-L1□2C24				1 (24VDC)
		2-position, maintained	S16SRS-L2□C5	1	1	1 (5VDC)	
			S16SRS-L2□C12			1 (12VDC)	
			S16SRS-L2□C24			1 (24VDC)	
			S16SRS-L2□2C5			2	1 (5VDC)
			S16SRS-L2□2C12				1 (12VDC)
			S16SRS-L2□2C24				1 (24VDC)
		3-position, spring return two-way	S16SRS-L3□2C5	2	1	1 (5VDC)	
			S16SRS-L3□2C12			1 (12VDC)	
			S16SRS-L3□2C24			1 (24VDC)	
		3-position, maintained	S16SRS-L4□2C5	2	1	1 (5VDC)	
			S16SRS-L4□2C12			1 (12VDC)	
			S16SRS-L4□2C24			1 (24VDC)	
		3-position, spring return from right	S16SRS-L5□2C5	2	1	1 (5VDC)	
			S16SRS-L5□2C12			1 (12VDC)	
			S16SRS-L5□2C24			1 (24VDC)	
		3-position, spring return from left	S16SRS-L6□2C5	2	1	1 (5VDC)	
			S16SRS-L6□2C12			1 (12VDC)	
			S16SRS-L6□2C24			1 (24VDC)	

※□ indicates color: R, B, G, Y, W

※The control unit, contact blocks, LED blocks are sold separately.

(control unit: bold letters, contact and LED block: regular letters)

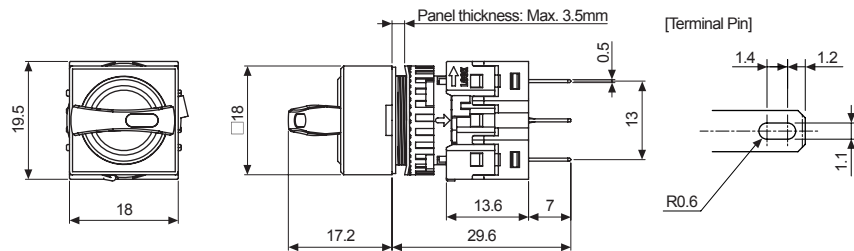
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.

It will not operate if connected to the center slot.

※The LED color is the same as the control unit.

• Dimensions

(unit: mm)


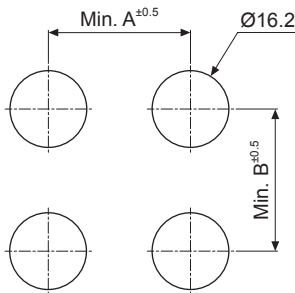















※For panel cut-out dimensions, please refer to page A-48.

Ø16 Panel Cut-out Dimensions

Ø16 Panel Cut-out Dimensions

(unit: mm)

Type			A	B	Panel Cut-out Dimensions
Push Button Switches	Round (S16PR Series)		20	21	
	Square (S16PRS Series)		20	21	
	Rectangular (S16PRT Series)		25	21	
Selector Switches	Round (S16SR Series)		20	21	
	Square (S16SRS Series)		20	21	
	Rectangular (S16SRT Series)		25	21	
Key Selector Switches	Round (S16KR Series)		20	21	
	Square (S16KRS Series)		20	21	
	Rectangular (S16KRT Series)		25	21	
Mushroom-head Push Button Switches (S16BR Series)			24	24	
Emergency Switches (S16ER Series)			40	40	
Pilot Lights	Round (L16RR Series)		20	21	
	Square (L16RRS Series)		20	21	
	Rectangular (L16RRT Series)		25	21	

Selector Switches

⊙ Mounting hole Ø16 Selector Switches

S16SR – **S** **1** **□** **R** **C** **□**

LED block	No-mark	None
	5	5VDC
	12	12VDC
	24	24VDC
Contact block	C	C contact: 1
	2C	C contact: 2
Color	R	Red
	B	Blue
	G	Green
	Y	Yellow
	W	White
Operation angle	No-mark	Left: 45°, Right: 45°
Operating position	1	2-position, spring return
	2	2-position, maintained
	3	3-position, spring return two-way
	4	3-position, maintained
	5	3-position, spring return from right
	6	3-position, spring return from left
Illuminated	S	Non-illuminated
	L	Illuminated
Item	S16SR	Mounting hole Ø16 Round Selector Switches
	S16SRS	Mounting hole Ø16 Square Selector Switches
	S16SRT	Mounting hole Ø16 Rectangular Selector Switches

Control Switches

- Ø16
- Ø22/25
- Ø30
- 30
- Push Button Switches
 - Round
 - Square
 - Rectangular
- Selector Switches
 - Round
 - Square
 - Rectangular
- Key Selector Switches
 - Round
 - Square
 - Rectangular
- Double Push Button Switches
- Mushroom-head Push Button Switches
- Emergency Switches
- Pilot Lights
- Accessories
- Buzzers

A Accessories

Common Accessories

Contact Blocks and LED Blocks for Ø16 Control Switches


Ordering Information




SA	16	CB	W	
Item				
Applied switches				
Type				
LED color ^{※1}				
LED block				
R	Red			
B	Blue			
G	Green			
Y	Yellow			
W	White			
CB ^{※2}				
CB	Contact block	B contact (normally closed)		
CC	Contact block	C contact (normally open, normally closed)		
L5	LED block	5VDC		
L12	LED block	12VDC		
L24	LED block	24VDC		
16	For Ø16 control switches			
SA	Switch Accessories			

※1. Only for LED blocks.

※2. Only for Ø16 emergency switches.


- **Contact block and LED block removal**
Separate the unit using a flat-head (-) screwdriver.





Item	Appearance	Model	Type	Features
Contact block		SA16-CB	B contact (normally closed)	For Ø16 emergency switches
		SA16-CC	C contact (normally open, normally closed)	—
LED block		SA16-L5□ (5VDC) SA16-L12□ (12VDC) SA16-L24□ (24VDC)	DC voltage type	Diverse, vibrant, high luminance LEDs (red, blue, green, yellow, white)

A Accessories

Locking Handle for Switches

Applied switches	Appearance	Model	Note
Ø16		SA16-LH	For locking switch nuts behind the panels

Accessories By Item

Item	Appearance	Model	Dimensions	Note
Lens remover for Ø16 push button control switches or pilot lights		SA16-RM		Lens remover for push button control switches or pilot lights