



Main Feature

1. From 1 to 3 Poles version are available with high switching current up to 30A.
2. Solder Lug Terminal with Flanged Case are available for customer's various application.

Contact Rating

Load Type	RPT (No Common)	RPT-2P	RPT- 3P	RP-2P	RP-3P
Rated Load (Resistive)	30A/28VDC	20A/15VDC	20A/15VDC	10A 240VAC	10A 240VAC
	30A/120VAC	13A/28VDC	13A/28VDC	13A 120VAC	13A 120VAC
	30A/240VAC	25A/120VAC	25A/120VAC	13A 28VDC	13A 28VDC
	10A/600VAC	25A/240VAC	25A/240VAC	-	-
	-	5A/600VAC	5A/600VAC	-	-
Contact Capacity	1Hp/120VAC	3/4Hp/120VAC	1/2/HP/120VAC	1/2HP 240VAC	1/2HP 240VAC
	1 1/2Hp/240VAC	1Hp/240VAC	1/2Hp/208/240VAC	1/3HP 120VAC	1/3HP 120VAC
Rated Carrying Current	30A	25A	25A	10A	10A
Max. Allowable Voltage	AC 600V	AC 300V	AC 300V	AC 300V	AC 300V
	DC 48V	DC 48V	DC 48V	DC 48V	DC 48V
Max. Allowable Current	30A	25A	25A	13A	13A
Max. Allowable Power Force	7,200VA	6,000VA	6,000VA	2,400VA	2,400VA
	840W	360W	360W	360W	360W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	SPST, SPDT	DPST, DPDT	3PST, 3PDT	DPST,DPDT	3PST,3PDT

Application

Vending Machine, Cooking Appliances, Office Machine, Domestic Appliances, Control Equipment, etc

Performance (at Initial Value)

- Contact Resistance 100 mΩ Max. @1A,6VDC
- Operate Time..... 15 mSec. Max.
- Release Time 10 mSec. Max.
- Dielectric Strength :
Between Coil & Contact 1,500VAC at 50/60 Hz for one minute.
Between Contacts 1,000VAC at 50/60 Hz for one minute.
- Surge Strength 1,500V (between Coil & Contact 1.2x50μSec.)
- Insulation Resistance 100 MegaΩ Min. at 500VDC.
- Max. On/Off Switching :
Electrical..... 6 Cycles per Minute.
Mechanical 300 Cycles per Minute.
- Temperature Range..... -45~70°C

- Humidity Range 45~85% RH.
- Coil Temperature Rise 50°C Max.
- Vibration :
Endurance 10 to 55 Hz dual amplitude width 1.5mm.
Error Operation..... 10 to 55 Hz dual amplitude width 1.5mm.
- Shock :
Endurance 1,000 m/S².
Error Operation..... 100 m/S².
- Life Expectancy :
Mechanical 10⁷ Operations at No Load condition.
Electrical..... 10⁵ Operations at Rated Resistive Load.
- Weight About 85 g.

Safety Standard & Its File Number

- RPT
- C-UL E175730
- RP
- NIL

Coil Specification (at 20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VAC/VDC)	Nominal Current (mA)		Coil Resistance ($\Omega \pm 10\%$)	Power Consumption	Pull-In Voltage	Drop-Out Voltage	Maximum Allowable Voltage
			50 Hz	60 Hz					
RP/T (VAC) 1P, 2P	01	6	309.1	261.5	4.2	Abt. 2.9~3.5VA	85% Maximum	30% Maximum	110% Maximum
	02	12	200.2	169.4	18				
	03	24	129.7	109.7	72				
	06	120	28.0	24.3	1,700				
	08	240	13.2	11.3	7,200				
RP/T (VAC) 3P	01	6	371.4	317.3	3.2	Abt. 3.8~4.6VA	85% Maximum	30% Maximum	110% Maximum
	02	12	253.3	216.4	14				
	03	24	172.8	147.6	55				
	05/06	120	37.7	32.0	1,300				
	07/08	240	16.6	13.9	5,510				
RP/T (VDC)	02	12	100.0		120	Abt. 1.2 W	80% Maximum	10% Maximum	110% Maximum
	03	24	50.8		472				
	04	48	26.7		1,800				
	05	110	11.0		10,000				
	06	120	12.0		10,000				

Ordering Information

RPT - N 01 D M S F L T D

Diode: Nil: Without Diode

D: With Diode Selection

Touch Button:

Nil: Without Test Button

T: With Test Button

LED:

Nil: Without LED

L: With LED Selection

Case Type:

Nil: Standard Square Shape

F: Top with Flanged Case

H: Side with Flanged Case

Terminal Type:

S: Quick Connect Tabs (width 4.80mm)

W: Quick Connect Tabs (width 6.50mm)

Contact Form:

Nil: Form C

M: Form A

B: Form B

Coil Type:

D: DC Coil

A: AC Coil

Coil Code:

01: 6V, 02: 12V, 03: 24V, 04: 48V, 05: 110V

06: 120V, 07: 220V, 08: 240V

Number of Pole:

N: Common

2: 2 Poles

3: 3 Poles

Type:

RP

RPT

Classification


Model	RP(T)		
Coil Type	AC Coil		
Contact Form	1 Pole	2 Poles	3 Poles(RP)
Number of Poles	1A / 1B	2C / 2A / 2B	3C / 3A / 3B
Terminal Type	RP(T)-N□□AS/AMS/ABS RP(T)-N□□AW/AMW/ABW	RP(T)-2□□AS/AMS/ABS RP(T)-2□□AW/AMW/ABW	RP(T)-3□□AS/AMS/ABS RP(T)-3□□AW/AMW/ABW
Case Type	RP(T)-N/2/3□□ASH/AMSH/ABSH RP(T)-N/2/3□□ASF/AMSF/ABSF	RP(T)-N/2/3□□AWH/AMWH/ABWH RP(T)-N/2/3□□AWF/AMWF/ABWF	
LED	RP(T)-N/2/3□□ASFL/AMSFL/ABSFL RP(T)-N/2/3□□AWFL/AMWFL/ABWFL		
Touch Button	RP(T)-N/2/3□□ASLT/AMSLT/ABSLT RP(T)-N/2/3□□ASFLT/AMSFLT/ABSFLT RP(T)-N/2/3□□AWFLT/AMWFLT/ABWFLT		
Diode	RP(T)-N/2/3□□ASFLTD/AMSFLTD/ABSFLTD RP(T)-N/2/3□□AWFLTD/AMWFLTD/ABWFLTD		

Model	RP(T)		
Coil Type	DC Coil		
Contact Form	1 Pole	2 Poles	3 Poles
Number of Poles	1A / 1B	2C / 2A / 2B	3C / 3A / 3B
Terminal Type	RP(T)-N□□DS/DMS/DBS RP(T)-N□□DW/DMW/DBW	RP(T)-2□□DS/DMS/DBS RP(T)-2□□DW/DMW/DBW	RP-3□□DS/DMS/DBS RP-3□□DW/DMW/DBW
Case Type	RP(T)-N/2/3□□DSH/DMSH/DBSH RP(T)-N/2/3□□DSF/DMSF/DBSF	RP(T)-N/2/3□□WH/DMWH/DBWH RP(T)-N/2/3□□DWF/DMWF/DBWF	
LED	RP(T)-N/2/3□□DSFL/DMSFL/DBSFL RP(T)-N/2/3□□DWFL/DMWFL/DBWFL		
Touch Button	RP(T)-N/2/3□□DSLTD/DMSLTD/DBSLTD RP(T)-N/2/3□□DSFLT/DMSFLT/DBSFLT RP(T)-N/2/3□□DWFLT/DMWFLT/DBWFLT		
Diode	RP(T)-N/2/3□□DSFLTD/DMSFLTD/DBSFLTD RP(T)-N/2/3□□DWFLTD/DMWFLTD/DBWFLTD		

Terminal Dimensions ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)


RP

.189" (4.8mm)
Quick Contact





RPT

.256" (6.5mm)
Quick Contact




Dimension ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

RP


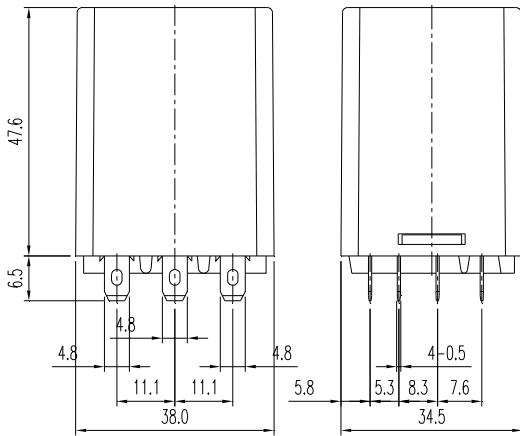


BOTTOM VIEW




BOTTOM VIEW

RPT

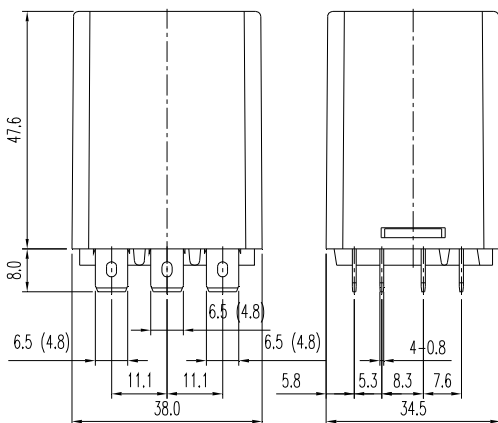

BOTTOM VIEW

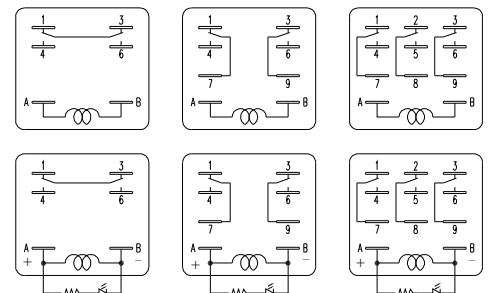

BOTTOM VIEW