
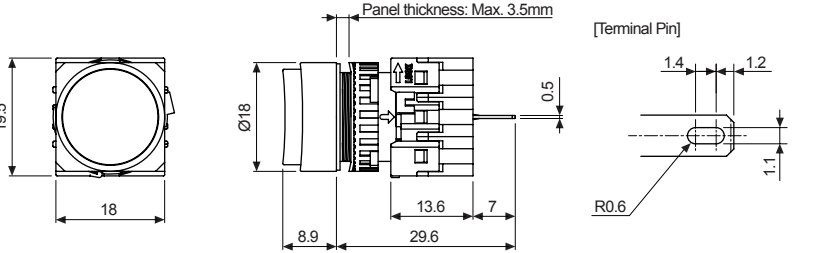

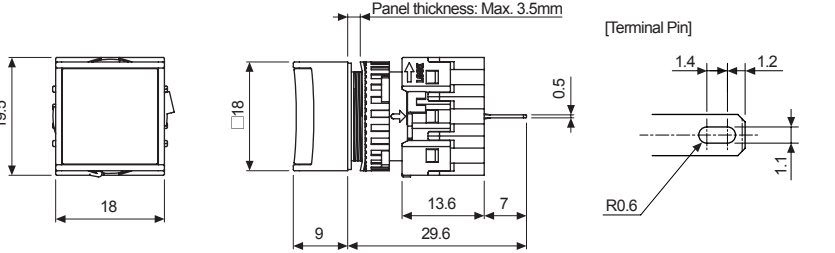




Ø16 Pilot Lights


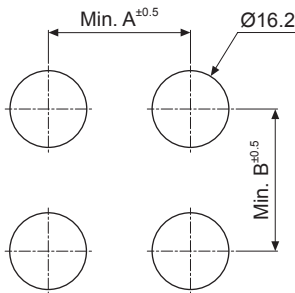













Ø16 Pilot Lights (L16RR Series)

Type	Appearance	Model	Contact block	LED block
			C contact	DC voltage
Flat round, extended	 <p>L16RR-EY□</p>	L16RR-E□5	—	1 (5VDC)
		L16RR-E□12		1 (12VDC)
		L16RR-E□24		1 (24VDC)
<p>※□ indicates color: R, B, G, Y, W</p> <p>※The light unit and LED blocks are sold separately. (light unit: bold letters, LED block: regular letters)</p> <p>※The LED color is the same as the control unit.</p> <p>• Dimensions (unit: mm)</p>  <p>※For panel cut-out dimensions, please refer to page A-48.</p>				
Type	Appearance	Model	Contact block	LED block
			C contact	DC voltage
Flat square (half guard), extended	 <p>L16RRS-HG□</p>	L16RRS-H□5	—	1 (5VDC)
		L16RRS-H□12		1 (12VDC)
		L16RRS-H□24		1 (24VDC)
<p>※□ indicates color: R, B, G, Y, W</p> <p>※The light unit and LED blocks are sold separately. (light unit: bold letters, LED block: regular letters)</p> <p>※The LED color is the same as the control unit.</p> <p>• Dimensions (unit: mm)</p>  <p>※For panel cut-out dimensions, please refer to page A-48.</p>				

Ø16 Panel Cut-out Dimensions

Ø16 Panel Cut-out Dimensions

(unit: mm)


Type			A	B	Panel Cut-out Dimensions
Push Button Switches	Round (S16PR Series)		20	21	
	Square (S16PRS Series)		20	21	
	Rectangular (S16PRT Series)		25	21	
Selector Switches	Round (S16SR Series)		20	21	
	Square (S16SRS Series)		20	21	
	Rectangular (S16SRT Series)		25	21	
Key Selector Switches	Round (S16KR Series)		20	21	
	Square (S16KRS Series)		20	21	
	Rectangular (S16KRT Series)		25	21	
Mushroom-head Push Button Switches (S16BR Series)			24	24	
Emergency Switches (S16ER Series)			40	40	
Pilot Lights	Round (L16RR Series)		20	21	
	Square (L16RRS Series)		20	21	
	Rectangular (L16RRT Series)		25	21	

Ordering Information

Pilot Lights

Mounting hole Ø16 Pilot Lights

L16RR — E R

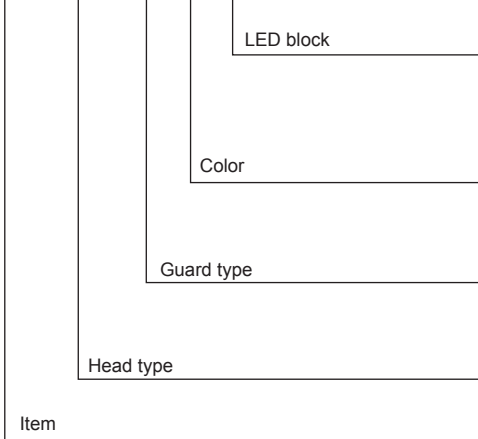

No-mark	None	
5	5VDC	
12	12VDC	
24	24VDC	
R	Red	
B	Blue	
G	Green	
Y	Yellow	
W	White	
Round	E	Extended
Square, Rectangular	H	Half guard
No-mark	Round	
S	Square	
T	Rectangular	
L16RR	Mounting hole Ø16 Pilot Lights	

A Accessories


Common Accessories

Contact Blocks and LED Blocks for Ø16 Control Switches




Ordering Information

SA	16	CB	W	
Item	Applied switches			LED block
	Type			LED color ^{※1}
	CB ^{※2}	Contact block	B contact (normally closed)	R Red
	CC	Contact block	C contact (normally open, normally closed)	B Blue
	L5	LED block	5VDC	G Green
	L12	LED block	12VDC	Y Yellow
	L24	LED block	24VDC	W White
	16	For Ø16 control switches		
	SA	Switch Accessories		

- **Contact block and LED block removal**
Separate the unit using a flat-head (-) screwdriver.




- ※1. Only for LED blocks.
※2. Only for Ø16 emergency switches.



Item	Appearance	Model	Type	Features
Contact block		SA16-CB	B contact (normally closed)	For Ø16 emergency switches
		SA16-CC	C contact (normally open, normally closed)	—
LED block		SA16-L5□ (5VDC) SA16-L12□ (12VDC) SA16-L24□ (24VDC)	DC voltage type	Diverse, vibrant, high luminance LEDs (red, blue, green, yellow, white)

A Accessories

Locking Handle for Switches

Applied switches	Appearance	Model	Note
Ø16		SA16-LH	For locking switch nuts behind the panels

Accessories By Item

Item	Appearance	Model	Dimensions	Note
Lens remover for Ø16 push button control switches or pilot lights		SA16-RM		Lens remover for push button control switches or pilot lights