

>>> RKE Miniature General Purpose Relay



RKE2CO



RKE4CO

Features

- > 2 pole 7A; 4 pole 5A
- > With non-polarity LED integrated in relay
- > With lockable test button and inspection window
- > Identification of coils through test button color (AC red/DC blue)
- > Conformity with RoHS Directive

Ordering Information

RKE

Contact form _____

2C: 2CO

4C: 4CO

Mount options _____

O: plug in

Coil voltage code _____

Code	006	012	024	036	048	110	220		
Voltage (V DC)	6	12	24	36	48	110	220		
Code	506	512	524	536	548	615	730	740	880
Voltage (V AC)	6	12	24	36	48	115	230	240	380

Options _____

LT: LED + test button

LTD: LED + test button + diode (13-, 14+)

LTD1: LED + Test button + diode (13+, 14-)

A: for signal control (selection plus A, namely LTA, LTDA, LSA)

Characteristics

	2C	4C
Configuration	2C	4C
Rated current/ Resistive load	7A/250VAC 30VDC	5A/250VAC 30VDC
Rated voltage Motor load	1/6HP 240VAC	
Switching capacity (resistive)	1750VA, 210W	1250VA 150W
Initial contact resistance	$\leq 50\text{m}\Omega$	
Contact	Material	Ag alloy
	Electric durability (110%rated voltage, 55°C)	$\geq 20 \times 10^4$ (1800 Ops/h)
	Electric durability (Normal temperature)	$\geq 40 \times 10^4$ (360 Ops/h)
	Mechanical durability	$\geq 2000 \times 10^4$ (18000 Ops/h)
Pick-up voltage (23°C)	DC: $\leq 75\%$ (Rated voltage), AC: $\leq 80\%$ 50/60Hz (Rated voltage)	
Drop-out voltage (23°C)	DC: $\geq 10\%$ (Rated voltage), AC: $\geq 30\%$ 50/60Hz (Rated voltage)	
Maximum voltage (23°C)	110% (Rated voltage)	
Insulation resistance	$\geq 500\text{M}\Omega$ (500VDC)	
Coil operating power	DC(W) approx. 0.9	
	AC(VA) approx. 1.2	
Operate time (at nominal voltage)	≤ 20 ms	
Release time (at nominal voltage)	≤ 20 ms	
Initial breakdown voltage	Between open contacts 2000VAC/1min (leakage current 1mA)	
	Between poles 2000VAC/1min (leakage current 1mA)	
	Between contacts and coil 2000VAC/1min (leakage current 1mA)	
Ambient temperature	-55~+70°C	
Humidity	35%~85%RH	
Air pressure	86~106KPa	
Shock resistance	10G (half-sine shock pulse: 11ms)	
Vibration resistance	10~55Hz double-amplitude:1.0mm	
Mounting	plug in	
Unit weight	35g	

Coil Specifications (23°C)


Nominal voltage V.DC	6	12	24	36	48	110	220		
Coil resistance Ω	40	180	640	1500	2600	13000	42000		
Nominal voltage V.AC	6	12	24	36	48	115	230	240	380
Coil resistance Ω	11.5	40	180	370	640	4430	16500	18790	42000

Remark: Coil resistance under coil voltage 110V are measured with tolerance of $\pm 10\Omega$, above coil voltage 110V are measured with tolerance of $\pm 15\Omega$.


Contact Specification

RKE2CO

Electrical durability contacts

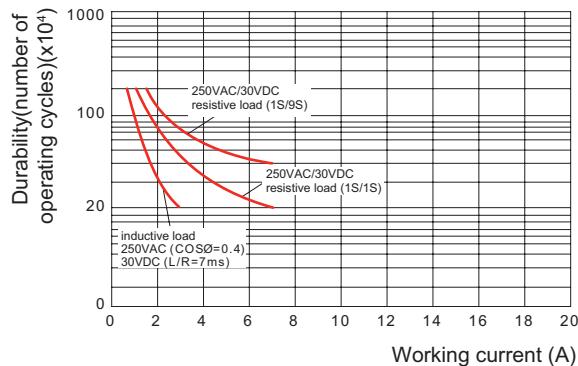


Maximum switching capacity

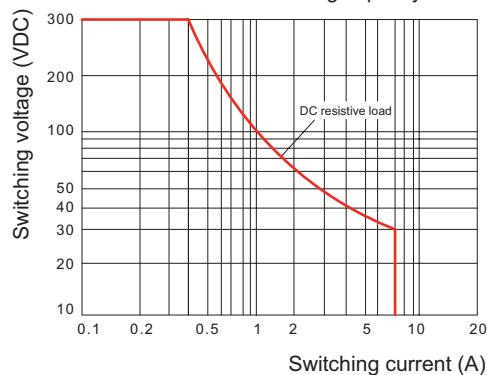


RKE4CO

Electrical durability contacts

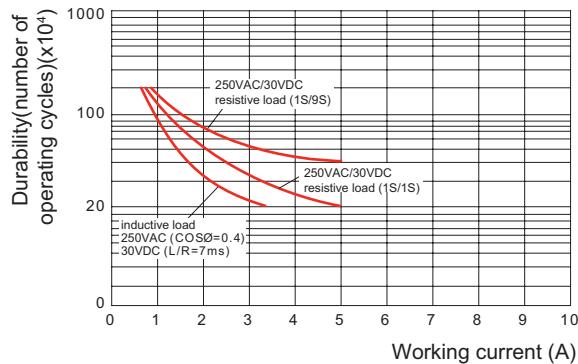


Maximum switching capacity

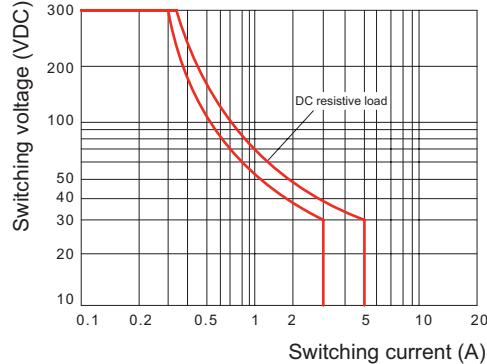


>>> RKE Miniature General Purpose Relay

Dimensions (mm)

RKE2CO

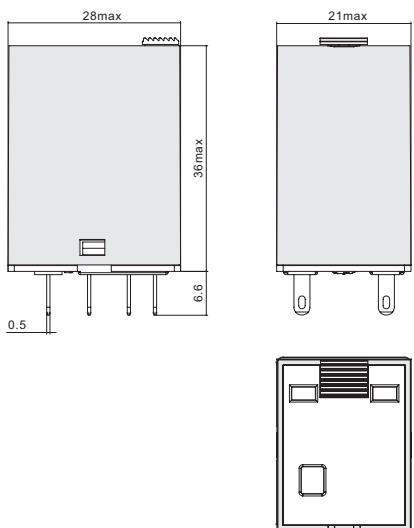


RKE4CO

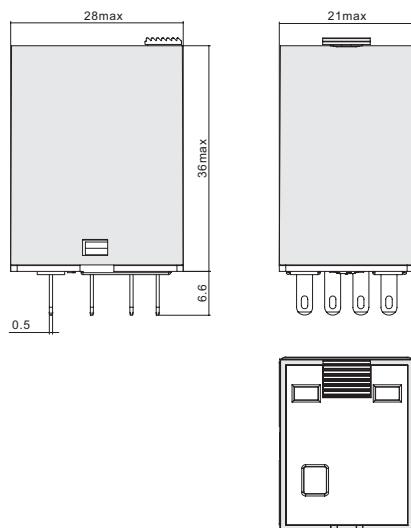

Wiring Diagrams

RKE2CO

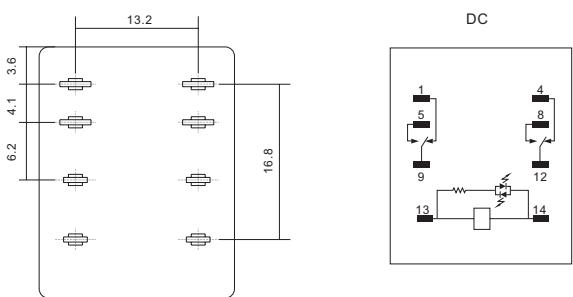

RKE4CO

