

Plastic square shape photoelectric sensors **PTF** series


Features

- ◆ Through beam reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy


Part number

		Emitter	Receiver			Emitter	Receiver
NPN	NO	PTF-TM10D	PTF-TM10DNO	PNP	NO	PTF-TM10D	PTF-TM10DPO
NPN	NC	PTF-TM10D	PTF-TM10DNC	PNP	NC	PTF-TM10D	PTF-TM10DPC
NPN	NO+NC	PTF-TM10D	PTF-TM10DNR	PNP	NO/NC	PTF-TM10D	PTF-TM10DPR

Technical specifications

Detection type	Through beam	Consumption current	≤25mA
Rated distance [Sn]	10m (non-adjustable)	Circuit protection	Short-circuit and reverse polarity
Standard target	> φ15mm opaque object	Response time	< 8.2ms
Light source	Infrared LED (880nm)	Output indicator	Emitter: Green LED Receiver: Yellow LED
Dimensions	50 mm *50 mm *17mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	10...30 VDC	Voltage withstand	1000V/AC 50/60Hz 60s
Min target	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP64
Load current	≤200mA (receiver)	Housing material	PC/ABS
Residual voltage	≤2.5V (receiver)	Connection type	2m PVC cable


Dimensions

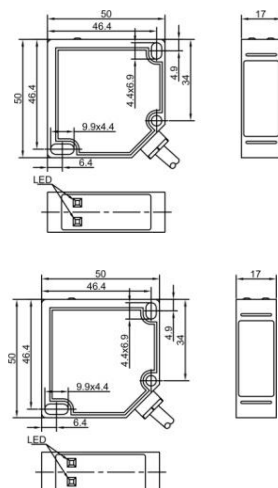


Emitter

Receiver


Wiring diagram




Emitter




NPN NO




NPN NC




NPN NO+NC



PNP NO



PNP NC



PNP NO+NC