




**57.02 57.04**

**Contact specification**

Contact form	2Z, 2H, 2D, 4Z, 4H, 4D
Contact resistance	≤100mΩ ( 1A 6VDC )
Contact material	AgCdO AgSnO <sub>2</sub>
Contact capacity	57.02:10A 250VAC/30VDC 57.04 5A 250VAC/30VDC



**57.02 57.04**



**Technical specification**

Insulation resistance	≥500MΩ ( 500VDC )
Dielectric strength	Between coil and contact ≥1500VAC1min
	Between open contacts ≥1000VAC1min
	Between contacts of different poles ≥1500VAC1min
Operate / Release time	≤25ms/25ms
Terminal type	PCB and socket mounting


**DC Coil data**

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	Ω ± 10%
5	4.0	0.5	28
6	4.8	0.6	40
12	9.6	1.2	160
24	19.2	2.4	640
48	38.4	4.8	2560
110	88.0	11.0	12100

**AC Coil data**

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VAC	VAC	VAC	Ω ± 10%
6	4.8	1.8	12
12	9.6	3.6	42
24	19.2	7.2	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000/16500

**Matched Socket**

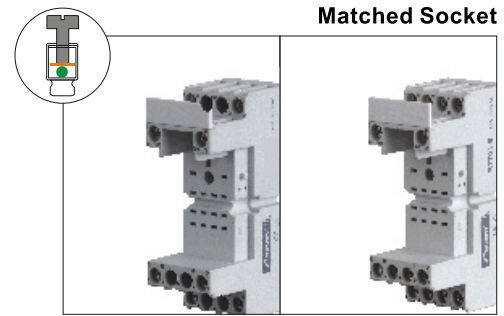


**RT702-B**

**RT704-B**


**Coil specification**

Rated coil power	0.9W / 1.2VA
------------------	--------------


**Outline dimension、Mounting holes (Bottom view)、 Wiring diagram (Bottom view)**

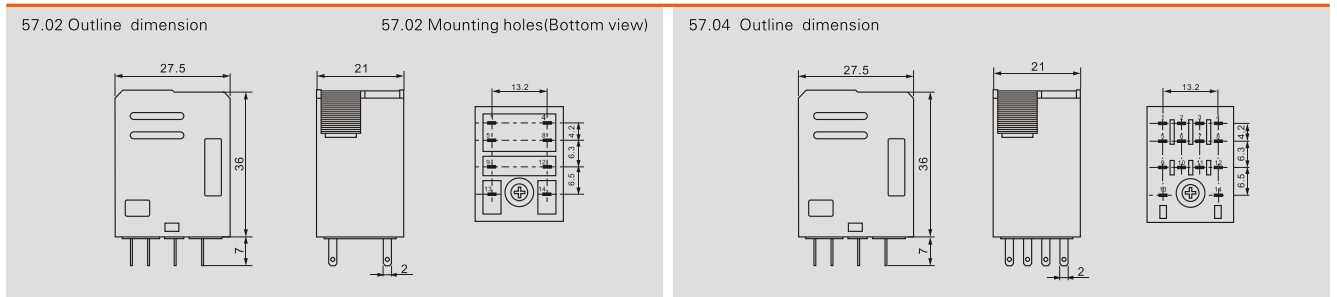

**57.02 Wiring diagram (Bottom view)**



**2Z**



**4Z**